

PROJECTEURS SUR RAIL

Spots pour pose sur rail ou normal


Rail : 3 / 5 CONNECTIONS

Tension : 85V - 265VAC

Informations supplémentaire sur les rails : info@ledotop.ch



Article n°	<u>LOT-022KC</u>	<u>LOT-022KD</u>	<u>LOT-022KE</u>
Tension	AC85-265V	AC85-265V	AC85-265V
Puissance	15W	20W	30W
Angle	24° - 60°	24° - 60°	24° - 60°
Couleur	2700K - 5500K	2700K - 5500K	2700K - 5500K
CRI / Ra	80 - 90	80 - 90	80 - 90
Lumens	700 - 970 lm	1400 - 1500 lm	2000 - 2200 lm
Durée vie	50'000 heures	50'000 heures	50'000 heures
IP protection	IP 64	IP 64	IP 64

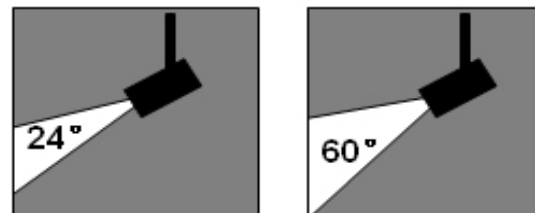

Angle de luminosité réglable de
24° à 60°

PROJECTEURS SUR RAIL




Article n°	<u>LOT-016C</u>	<u>LOT-016D</u>	<u>LOT-016E</u>
Tension	AC85-265V	AC85-265V	AC85-265V
Puissance	15W	20W	30W
Angle	26°-38°-44°	26°-38°-44°	26°-38°-44°
Couleur	2700K - 5500K	2700K - 5500K	2700K - 5500K
CRI / Ra	80 - 90	80 - 90	80 - 90
Lumens	700 - 970 lm	1400 - 1500 lm	2000 - 2200 lm
Durée vie	50'000 heures	50'000 heures	50'000 heures
IP protection	IP 64	IP 64	IP 64



Article n°	<u>LOT-024C</u>	<u>LOT-024D</u>
Tension	AC85-265V	AC85-265V
Puissance	15W	20W
Angle	26°-38°-44°	26°-38°-44°
Couleur	2700K - 5500K	2700K - 5500K
CRI / Ra	80 - 90	80 - 90
Lumens	710 - 900 lm	900 - 1100 lm
Durée vie	50'000 heures	50'000 heures
IP protection	IP 64	IP 64



Article n°	<u>LOT-025KC</u>
Tension	AC85-265V
Puissance	8W
Angle	26° - 60°
Couleur	2700K - 5500K
CRI / Ra	80 - 90
Lumens	310 - 400 lm
Durée vie	50'000 heures
IP protection	IP 64

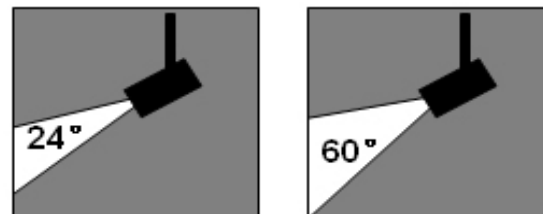

Angle de luminosité réglable de 24° à 60°



PROJECTEURS SUR RAIL



Article n°	<u>LOT-027C</u>
Tension	AC85-265V
Puissance	8W
Angle	26°/38°/44°
Couleur	2700K - 5500K
CRI / Ra	80 - 90
Lumens	310 - 400 lm
Durée vie	50'000 heures
IP protection	IP 64



Article n°	<u>LOT-034KA</u>	<u>LOT-034KC</u>
Tension	AC85-265V	AC85-265V
Puissance	32W	45W
Angle	24° - 60°	24° - 60°
Couleur	2700K - 5500K	2700K - 5500K
CRI / Ra	80 - 90	80 - 90
Lumens	2100 - 3000 lm	3200-4100 lm
Durée vie	50'000 heures	50'000 heures
IP protection	IP 64	IP 64

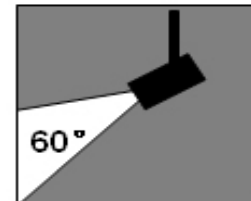

Angle de luminosité réglable de
24° à 60°

Données techniques pour rail spots nous contacter