

MODEL	PUISSANCE	TENSION	TYPE DE VARIATION	DEGRÉ	LUMENS
CO-4BAY-150	150W	AC90-277V	DALI	30° 60° 120°	21'000 lm
CO-4BAY-240	240W	AC90-277V	DALI	30° 60° 120°	33'600 lm
CO-T400-200	200W	AC90-277V	DALI	30° 60° 120°	28'000 lm
CO-T400-400W	400W	AC90-277V	DALI	30° 60° 120°	56'000 lm
CO-T400-600W	600W	AC90-277V	DALI	30° 60° 120°	84'000 lm
LOTJEPRO1500	1500W	AC90-277V	DALI ZigBee	12° 24° 36° 45° 90°	195'000 lm



MODEL	PUISSANCE	TENSION	GESTION	DEGRÉ	LUMENS
HC-A10	100W	AC100-277V	DALI / ZigBee	120°	12'000 lm
HC-A15	150W	AC100-277V	DALI / ZigBee	120°	18'600 lm
HC-A20	200W	AC100-277V	DALI / ZigBee	120°	26'000 lm
HC-A30	300W	AC100-277V	DALI / ZigBee	120°	38'000 lm

MODEL	PUISSANCE	TENSION	CERTIFIER	DEGRÉ	LUMENS/WATT
CES-J200	185W	110-277VAC	Ex	15° / 36° / 60° / 90° / 120°	115 lm/W
CES-J200	150W	110-277VAC	Ex	15° / 36° / 60° / 90° / 120°	115 lm/W
CES-J200	120W	110-277VAC	Ex	15° / 36° / 60° / 90° / 120°	115 lm/W
CES-J100	100W	110-277VAC	Ex	15° / 36° / 60° / 90° / 120°	115 lm/W
CES-J100	80W	110-277VAC	Ex	15° / 36° / 60° / 90° / 120°	115 lm/W
CES-J100	60W	110-277VAC	Ex	15° / 36° / 60° / 90° / 120°	115 lm/W
CES-J40S	40W	110-277VAC	Ex	15° / 36° / 60° / 90° / 120°	115 lm/W
CES-J40S	30W	110-277VAC	Ex	15° / 36° / 60° / 90° / 120°	115 lm/W
CES-J40S	20W	110-277VAC	Ex	15° / 36° / 60° / 90° / 120°	115 lm/W



GESTION ET VARIATION PAR DALI / ZIGBEE / DÉTECTEUR DE PRÉSENCE ET SONDE DE LUMINOSITÉ

IP65

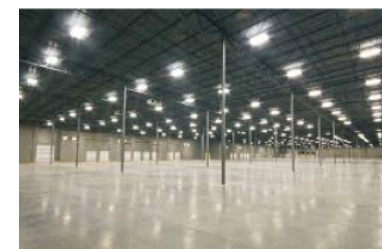

COULEUR DE FINITION: JAUNE / GRIS

